


SHINELITE SMART HOME

US STANDARD CATALOGUE

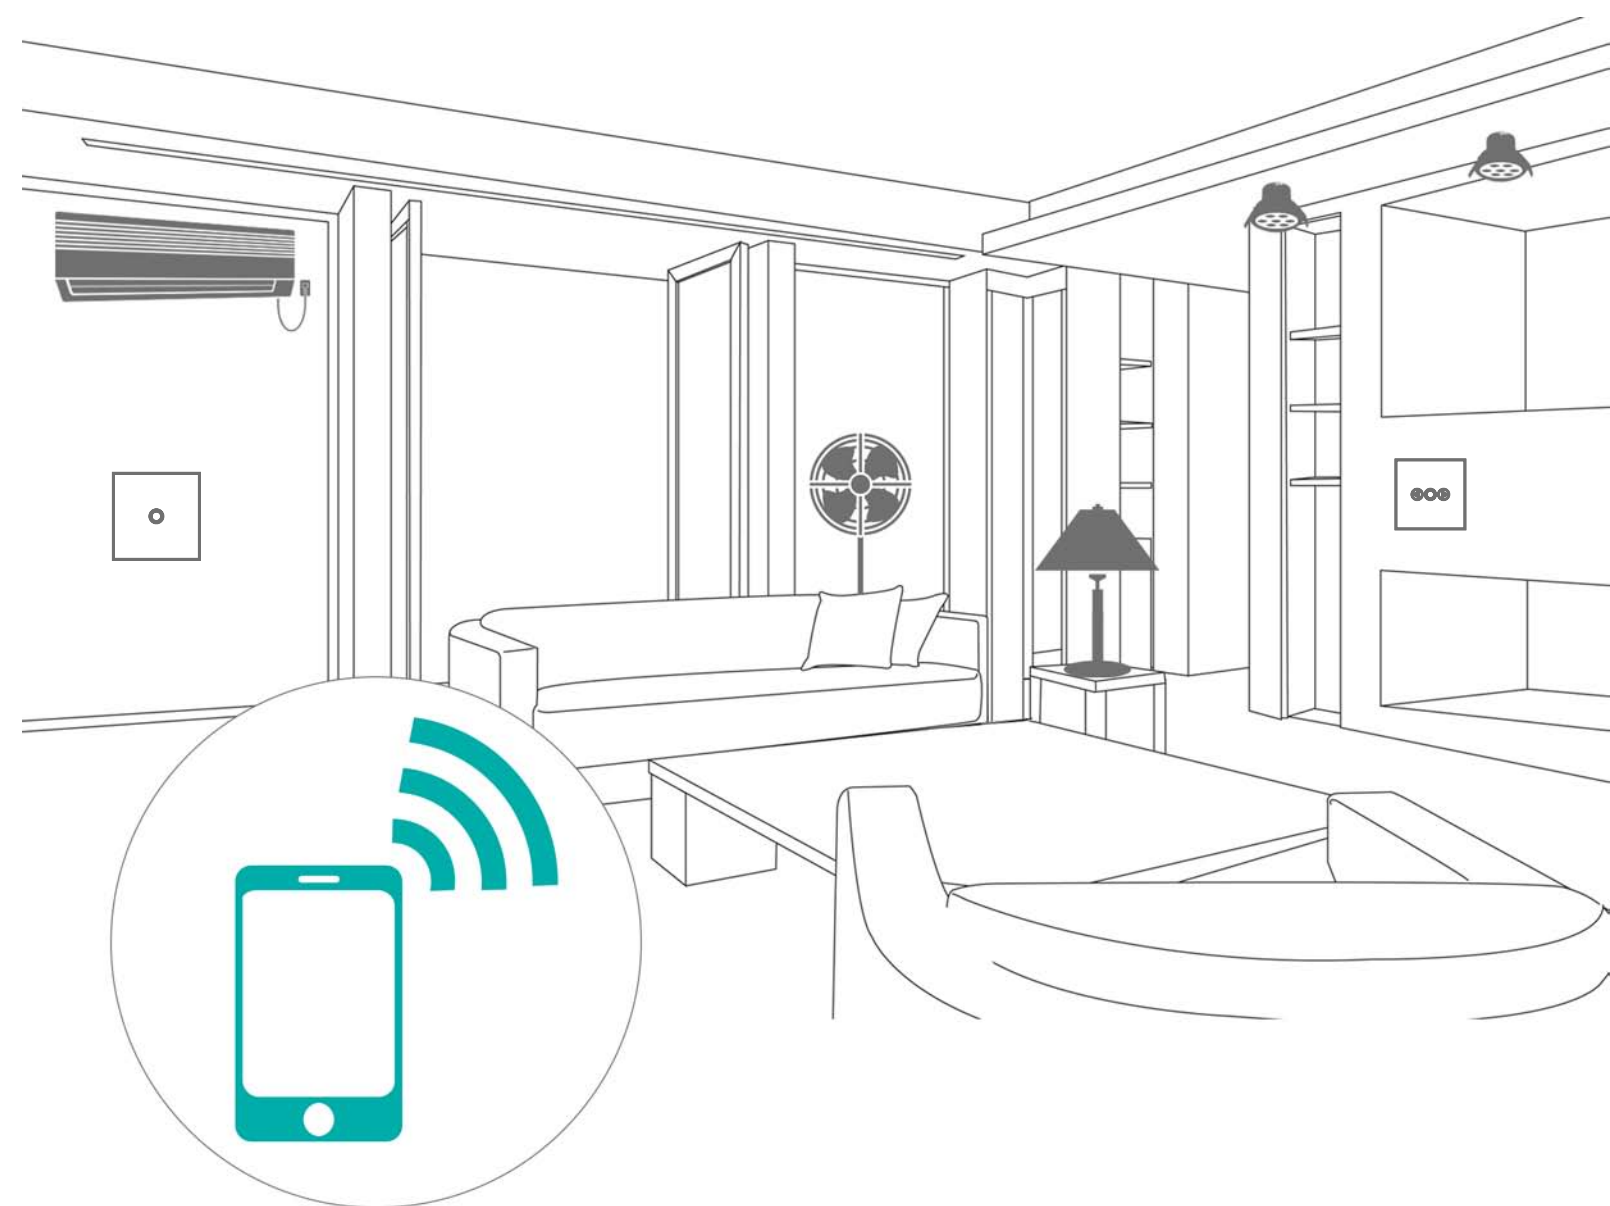

Shanghai Shinelite Electric Co.,Ltd.

Headquarters

No. 2588 Jinhai Road, Pudong New Area, Shanghai, China

Tel: (86)21-58990776 Fax: (86)21-58990776

Email: bruce@shinelite.cc Web: www.shinelite.cc

Production Base

Fuyang Economic & Technical Development Zone, Hangzhou, China



SHINELITE ELECTRIC

Technology light up life,
Innovation lead the future...



About Shinelite

Shanghai Shinelite Electric Co.,Ltd is a high-tech enterprise is in the R & D, manufacturing, sales of intelligent home products including wall switch, touch switch, intelligent socket,socket with USB and so on.

With a number of professional technicians and international advanced technology, establish a strict quality control system, to make products more perfect, let the world home environment more comfortable.

Under idea of “make electric safety, simple, green ”,to provide customer with high-quality products and perfect service faced today and future,we will be more professional, create a new “switch” trend after innovation and actively explore.



Aliexpress
SHINELITE E- Store

SHINELITE Smart Home


Technology light up life,
Innovation lead the future.




Electric Control



Lighting Control




Security Monitoring



Air Purification


High quality crystal tempered
glass panel design, never fade

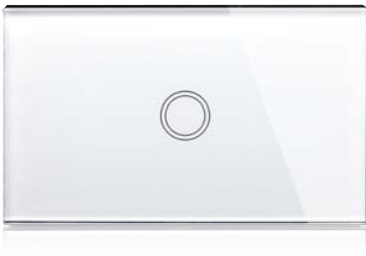

US01W / UK01WR



US01B / UK01BR





Remote

Remote Specifications:

Remote range: 30M
Remote battery: 12V,23AE
Frequency: 433Mhz
Output Power:50mW

US Touch / Remote Switch

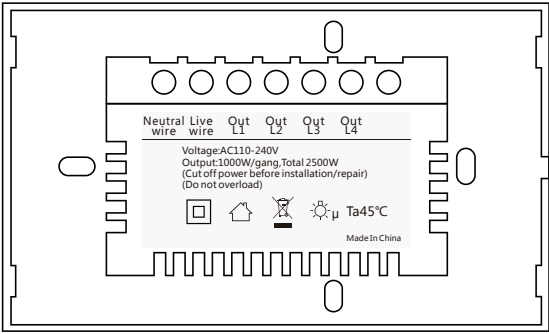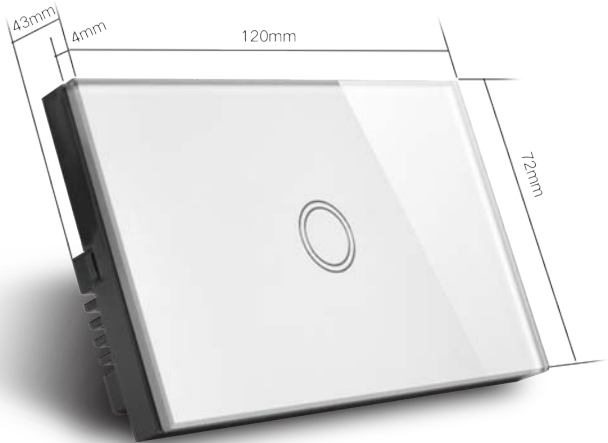

1. High quality crystal tempered glass panel design, never fade
2. With blue LED indicator, very distinguished., more humanization design: 50% brightness of backlight when switch is off ,100% brightness of backlight when switch is on
3. E-start, no sparking contacts
4. Brand new imported American IC & capacitive touch sense, more superior performance & sensitive touch.
5. Overload & overheat protections, make your home safer.
6. Support double wire and single live wire control, easy to install, replace the old switch directly.
7. Applicable to all the common lamps, such as incandescent, fluorescent lamps, led lamps ,motor and so on
8. Suitable for home, office, hotel, hospital and so on.
9. Note“R” means the switch has remote control function


Technical Parameters

Model	US01W/B	US02W/B	US03W/B	US01WR/BR	US02WR/BR	US03WR/BR
Contral Gang	1 Gang	2 Gang	3 Gang	Remote 1 Gang	Remote 2 Gang	Remote 3 Gang
Rated voltage	AC110V-240V					
Rated Power	1000W/Gang,total 2500W					
Rated Frequency	50Hz-60Hz					
Panel Material	crystal glass panel,high quality flame retardant PC bottom case					
Self Power Consuming	≤0.1mA					
Dimension(mm)	120mm*72mm*43mm					

Touch Dimmer switch / Remote control >>




USDW / USDWR




USDB / USDBR

- Including all functions of touch switch, you can also enjoy the dimmer functions freely.
- Touch ‘◀’ button, the light will become brighter. Touch ‘▶’ button, the light will become weaker.
- Used for incandescent lamps, halogen lamps ONLY.
- Note: If working for LED lamp,
 - 1) LED lamp must be dimmable and more than 20W.
 - 2) Specifications of LED driver: AC 220V 50Hz/60Hz; Standby current 300mA at least.

Touch Timer switch / Remote control >>




USTW / USTWR




USTB / USTBR

- Including all functions of touch switch, you can also enjoy the time delay functions freely.
- Touch ‘⋮’ button, the light will be automatically off after 3 minutes.
- Touch ‘⋮⋮’ button, the light will be automatically off after 9 minutes.
- No need to turn off the light in dark, enjoy the fun of Auto. light off.

Touch Fan switch / Remote control >>



USFW / USFWR




USFB / USFBR

- 3-Mode speed: High-Middle-Low from left to right.
- ON/OFF button, touch once to turn on the fan, touch the same button to turn off.
- Support double wire and Single live wire control, easy to install, replace the old switch directly.
- Used for ceiling fans ONLY.
- Operating voltage: 110-240VAC/50Hz~60Hz.
- Rated load: less than 100-600W/Gang

Touch Curtain switch / Remote control >>




USCW / UKCWR



USCB / USCBR

- Touch ‘⏮’ button, the curtain will open; touch ‘⏭’ button, the curtain will close; touch ‘⏸’ button, the curtain will stop automatically.
- Support double wire and single live wire control, easy to install, replace the old switch directly.
- Only support the curtain with stop function.
- Operating voltage: 110-240VAC/50Hz~60Hz.
- Rated load: less than 100-600W/Gang

Touch Doorbell switch >>




USDBW



USDBB

- High quality crystal tempered glass panel design, never fade.
- With blue LED indicator, very distinguished.
- Support double wire and single live wire control, easy to install, replace the old switch directly.
- Only support the 110-220V“Dingdong”doorbell.
- Operating voltage: 110-240VAC/50Hz~60Hz.
- Rated load: less than 100W/Gang

Wall Socket >>

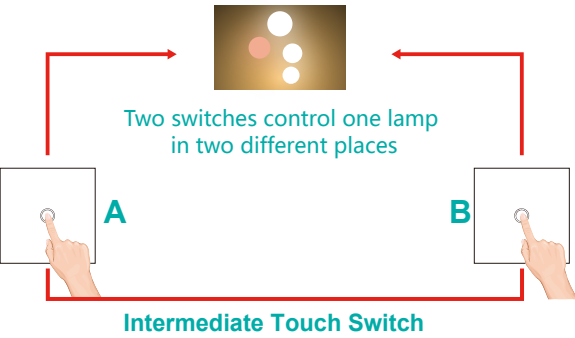


- The same light can be controlled by two switches in two different places
- Do not need to turn on/off the light in one place, very convenient.
- Note: The two switches should be installed in the same room or floor.
- Try to avoid installing them in the corners or between walls.
- Control Distance: less than 20m.
- Frequency: 433 MHz.
- Every intermediate touch switches consist of two switches (Switch A & Switch B).
- Switch B only support double wire.

Wall Socket >>




USS404W

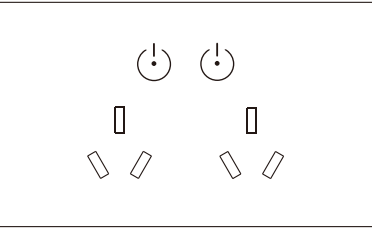

USS4042W

Dimension: 120*72*42MM
Voltage: 110-240V AC/50~60Hz
Operating Current: 15A

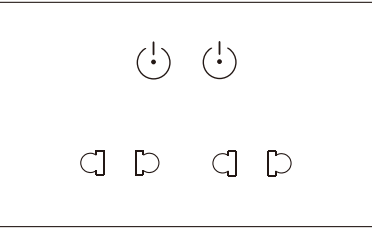

USS4032W


Remote range: 30M
Remote battery: 12V,23AE
Frequency: 433Mhz

Technical Parameters


Model	USS404W/B	US4052W/B	US405U2W/B
REMOTE BATTERY		12V,23AE	
Frequency		433Mhz	
Rated voltage		AC110V-240V	
Operating Current		15A	
Rated Frequency		50Hz-60Hz	
Panel Material	Hight quality tempered glass panel design,never fade.Eeasy to install,		
Self Power Consuming		≤0.1mA	
Dimension(mm)		86mm*86mm*39mm	



TV TEL NET Series socket >>







US443




US438

- Hight quality tempered glass panel design,never fade.
- Eeasy to install,replace the old switch directly.
- Glass size:5MMswitch directly.

UK siwtch models >>



Picture	No.	Description	Carton	Volume(cbm)
	US01	1 gang 1 way touch switch	100pcs	0.034
	US02	2 gang 1 way touch switch	100pcs	0.034
	US03	3 gang 1 way touch switch	100pcs	0.034
	US01	1 gang 1 way remote control	100pcs	0.034
	US02R	2 gang 1 way remote control	100pcs	0.034
	US03R	3 gang 1 way remote control	100pcs	0.034
	USB	Touch doorbell switch	100pcs	0.034








US01W

W mean White
B mean Black
R mean Remote

UK curtain models >>

Picture	No.	Description	Carton	Volume(cbm)
	USC	Touch curtain switch	100pcs	0.034
	USCR	Touch curtain switch remote control	100pcs	0.034

UK socket models >>

Picture	No.	Description	Carton	Volume(cbm)
	US4042	2 gang switch 3 pin socket	100pcs	0.034
	US4032	2 gang switch 2 pin socket	100pcs	0.034
	US4051	1 gang switch socket with USB	100pcs	0.034
	US443	1 gang RJ45 data socket +single satellite socket	100pcs	0.034
	US438	1 gang telephon socket secondary	100pcs	0.034










UK404UW

W mean White
B mean Black
R mean Remote

New Packing >>

UK dimmer/ timmer/ fan switch >>

Picture	No.	Description	Carton	Volume(cbm)
	USD	Touch dimmer switch	100pcs	0.034
	USDR	Touch dimmer switch remote control	100pcs	0.029
	UST	Touch timer switch	100pcs	0.0290.034
	USTR	Touch timer switch remote control	100pcs	0.034
	USF	Touch fan switch	100pcs	0.034
	USFR	Touch fan switch remote control	100pc	0.029



W mean White
B mean Black
R mean Remote

